




Mechanism Mounting Screws Anti-Rotation Kit (For Use With Bulletin 1494V, 100 Amp, Series A and Bulletin 1494V, 200 Amp, Series B Disconnect Switches) (Cat 1494V-H13) (This kit contains enough parts for (5) disconnect switches)




ATTENTION: To prevent electrical shock, disconnect from power source before installing or servicing. Install in suitable enclosure.


**Parts Required for (1) Disconnect Switch - Bulletin 1494V, 100 AMP, Series A
Bulletin 1494V, 200 AMP, Series B**



Brackets




Adhesive



Instruction Sheet

Inspection

- ① Inspect disconnect for molding fractures in area near drive mechanism as shown in **Figure 1**. If there are any fractures replace disconnect switch and mechanism.
- ② Inspect the screws on the drive mechanism as shown in **Figure 1**. If any of the drive mechanism screws are missing replace disconnect switch and drive mechanism.

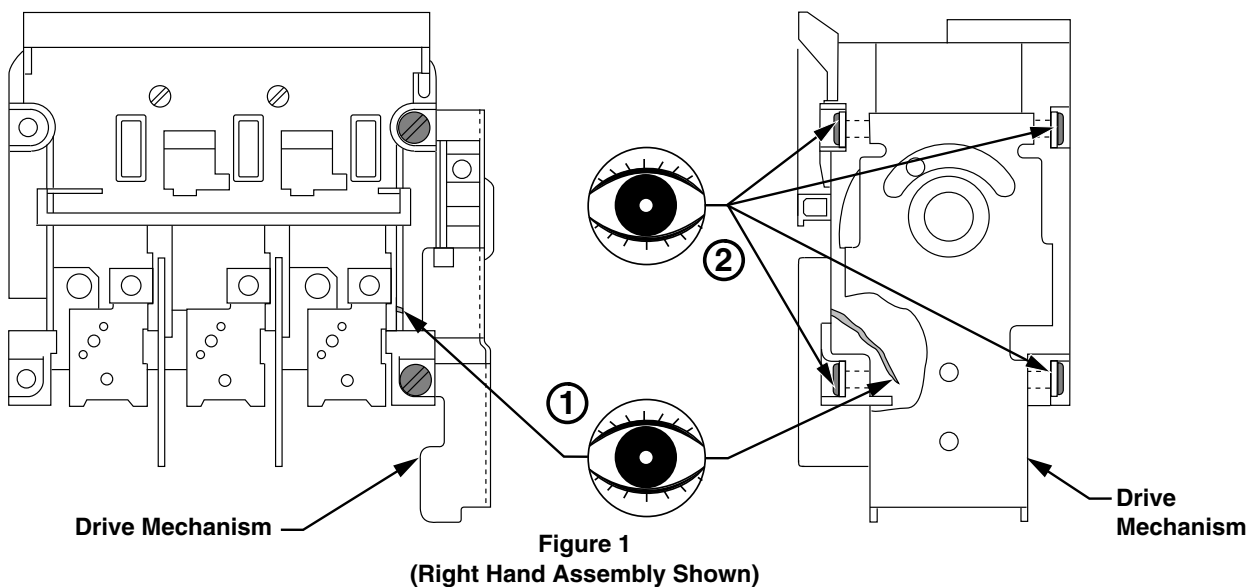

Adhesive Application

IMPORTANT: Make sure the 4 screwheads (see **Figure 1**) and bracket are free of contaminants.

- ① Unscrew cap from adhesive tube and puncture seal with pin located inside of cap.
- ② Completely fill recesses of brackets with adhesive as shown in **Figure 2**.

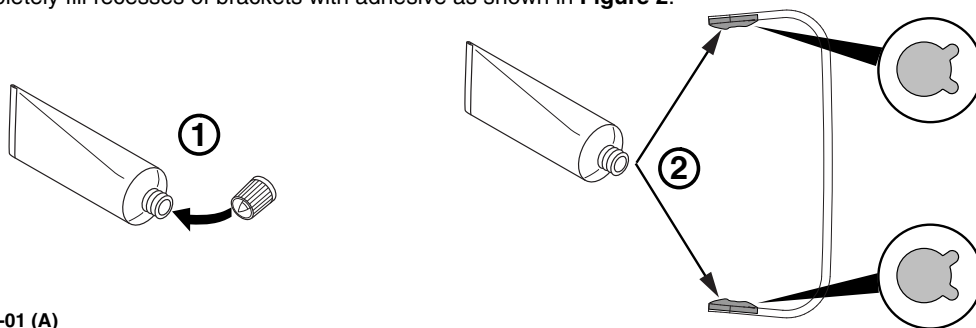


Figure 2